


LED BulkHead [Plafoniere]

JLT- BH41121



Photometric data files (LDT/IES) for various beam angles are available upon request.

OVERALL DIMENSIONS

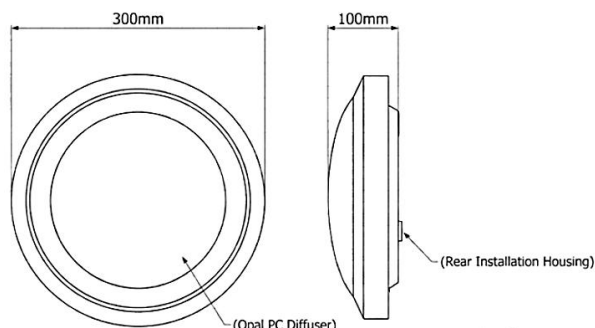

SKU Brief Description

300104112101	: 15W, 4000k, LED SMD PCBA
300104112102	: 15W, 5700k, LED SMD PCBA
300104112103	: 20W, 4000k, LED SMD PCBA
300104112104	: 20W, 5700k, LED SMD PCBA
300104112105	: 16W, 3000k, 2x8 LED E27 Lamps
300104112106	: 16W, 6500k, 2x8 LED E27 Lamps
300104112107	: 26W, 3000k, 2x13 LED E27 Lamps
300104112108	: 26W, 6500k, 2x13 LED E27 Lamps
300104112109	: With 2xE27 Lamp Holders

PRODUCT OVERVIEW

Decorative round bulkhead (Plafoniere), featuring a robust, impact-resistant polycarbonate body that ensures long-term durability. Engineered with a high-performance opal PC diffuser providing exceptionally uniform. Available with integrated LED SMD PCBA or compatible with E27 LED lamps.

KEY FEATURES

- Polycarbonate housing
- Opal PC Diffuser
- High-efficiency LED light source
- Wall/Ceiling mounting installation
- IP65 weatherproof construction
- Excellent heat dissipation
- Impact-Resistant Body
- Suitable for outdoor/indoor use

APPLICATIONS

- Building facades.
- Entrances.
- Staircases.
- Balconies.
- Parking areas.
- Architectural lighting
- Villas & Parks
- Outdoor commercial areas

TECHNICAL SPECIFICATIONS

Input Voltage	: 220-240VAC, 50/60Hz
Power	: (15 / 20) W
Luminous Flux	: (1500 / 2000) lm
Efficacy (lm/W)	: 100 lm/W
Light Source	: High Power LED (SMD)
CCT	: 4000K / 5700K
CRI	: ≥ 80
Beam Angle	: Symmetric 120°
Optical System	: Opal PC Diffuser
IP Rating	: IP65
Mounting	: Wall, Ceiling and Surface
Driver	: Philips or Alternative
Body Color	: White
Lifetime	: 50,000 Hours
Warranty	: 3 Years