


LED NeonFlex Strip

JLT-NF43123

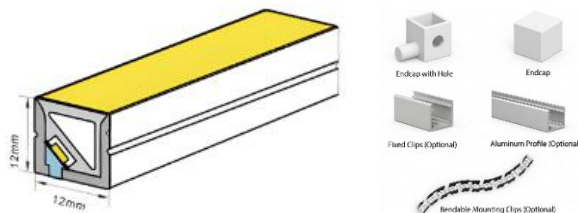

Photometric data files (LDT/IES) for various beam angles are available upon request.

OVERALL DIMENSIONS



SKU

Brief Description

1212431239301 : 5W, 3000k, 3D, 265lm/m, 53lm/w
1212431239402 : 5W, 4000k, 3D, 290lm/m, 58lm/w
1212431239603 : 10W, 3000k, 3D, 480lm/m, 48lm/w
1212431239304 : 10W, 4000k, 3D, 530lm/m, 53lm/w
1212431239405 : 5W, 3000k, TB, 265lm/m, 53lm/w
1212431239606 : 5W, 4000k, TB, 290lm/m, 58lm/w
1212431230007 : 10W, 3000k, TB, 480lm/m, 48lm/w
1212431230008 : 10W, 4000k, TB, 530lm/m, 53lm/w
1212431230009 : 5W, 3000k, SB, 265lm/m, 53lm/w
1212431230010 : 5W, 4000k, SB, 290lm/m, 58lm/w
1212431230011 : 10W, 3000k, SB, 480lm/m, 48lm/w
1212431239301 : 10W, 4000k, SB, 530lm/m, 53lm/w

PRODUCT OVERVIEW

The 1212 (mm) Multi-Directional NeonFlex LED Strip is engineered for ultimate geometric freedom. Its advanced design supports Top Bend, Side Bend, and 3D Twist Bend installations, allowing seamless adaptation to complex, multi-dimensional structures.

KEY FEATURES

- Anti-yellowing silicone, PET core.
- IP67 weatherproof construction
- Uniform Neon soft light, no hotspots
- High-efficiency LED light source
- Top, Side and 3D Twist Bend installation
- Long lifetime with low maintenance
- Suitable for Façade lighting
- RoHS compliant

APPLICATIONS

- Decorative and Façade lighting
- Architectural outdoor lighting
- 3D contour & accent lighting

INSTALLATION INSTRUCTIONS

- Bend Diameter, min Ø60mm
- No stretching/pulling; press gently
- Cut only at marks (straight cut)
- Install >2m with 2 people
- Install by qualified personnel



TECHNICAL SPECIFICATIONS

Input Voltage : 24V DC
Power : (5 / 10) W/m
Efficacy (lm/W) : 48~58 lm/W
Light Source : Osram 2835, copper base
CCT : 3000K / 4000K
CRI : ≥ 90
IP Rating : IP67
Reel Dim. : Each reel 5 meters
Body Color : White
Lifetime : 50,000 Hours
Warranty : 3 Years