

# LED POLE TOP


JLT-PT42122



Durable design with die-cast housing and tempered glass. Features 6KV surge protection, anti-UV lens, and a smooth, streamlined design to prevent dust and water buildup while minimizing light loss.

Light distribution options vary by product:

- **Symmetric light** is suitable for squares, plazas, and open areas.
- **Asymmetric light** is ideal for streets and pathways.

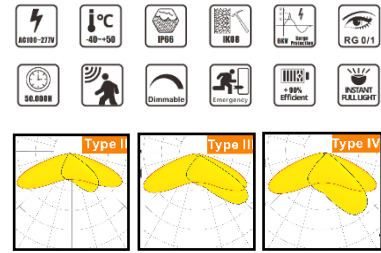

IESNA STANDARD	Coverage / MH
Type II	1-2x MH
Type III	1.5-3x MH
Type IV	2-4x MH

#### Features:

**Housing:** Die-cast aluminum, 96 W/m·K

**LED:** CCT 3000 – 4000 – 6500 K, CRI>70, SDCM<6

**Driver:** Upon customer request, >93% efficiency, PF>0.95, THD<15%, OTP/OCP/OVP/SCP

**Functions:** PWM, DALI, 0/1–10V dimming

**Protection:** 6KV, IP66, IK08

**Electrical:** 100–277V, 50/60Hz

**Lifetime:** L90B10 >50,000h

#### Specs:

<b>539422122315</b>	30W - 4500lm - 150lm/W	<b>539422122317</b>	30W - 5100lm - 170lm/W
<b>539422122415</b>	40W - 6000lm - 150lm/W	<b>539422122417</b>	40W - 6800lm - 170lm/W
<b>539422122615</b>	60W - 9000lm - 150lm/W	<b>539422122617</b>	60W - 10200lm - 170lm/W
<b>539422122915</b>	90W - 13500lm - 150lm/W	<b>539422122917</b>	90W - 15300lm - 170lm/W

#### Dimensions

