

LED InGround UpLight

JLT-UP37079



Photometric data files (LDT/IES) for various beam angles are available upon request.

PRODUCT OVERVIEW

LED Inground Uplight with a High-performance outdoor architectural luminaire engineered for powerful, seamless ground-level illumination. Features superior thermal management and maximum corrosion resistance to guarantee long-lasting durability in harsh environments.


KEY FEATURES

- Die-cast aluminium housing
- Front Ring SS 304
- Tempered glass
- Electrostatic powder-coated finish
- High-efficiency LED light source
- Inground installation
- IP67 weatherproof construction
- Excellent heat dissipation
- Long lifetime with low maintenance
- Suitable for outdoor landscape lighting

APPLICATIONS

- Architectural Accent Lighting
- Landscape
- Pathway & Perimeter Guidance
- Trees and shrubs uplighting
- Villas & Parks
- Outdoor commercial areas

OVERALL DIMENSIONS

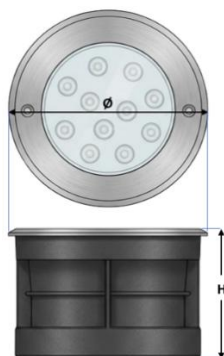

SKU	Dimensions (mm)
05380790106	: 7W, Ø120×H100, Cutout Ø115
06380790109	: 10W, Ø150×H100, Cutout Ø135
07380790112	: 15W, Ø160×H100, Cutout Ø146
08380790118	: 18W, Ø180×H100, Cutout Ø156

TECHNICAL SPECIFICATIONS

Input Voltage	: 220-240VAC, 50/60Hz
Power	: (7 / 10 / 15 / 18) W
LEDs/Wattage	: (6 / 9 / 12 / 18)
Light Source	: High Power LED (SMD)
CCT	: 3000K / 4000K / 6500K
CRI	: ≥80
Light Distribution	: Symmetric
Beam Angle	: 15° / 30° / 45° / 60°
Optical System	: High-Efficiency Optical Lens
IP Rating	: IP67
Mounting	: Inground
Body Color	: Black
Lifetime	: 50,000 Hours
Warranty	: 5 Years